




J-Guard Panel 2300m x 845mm

Product Images

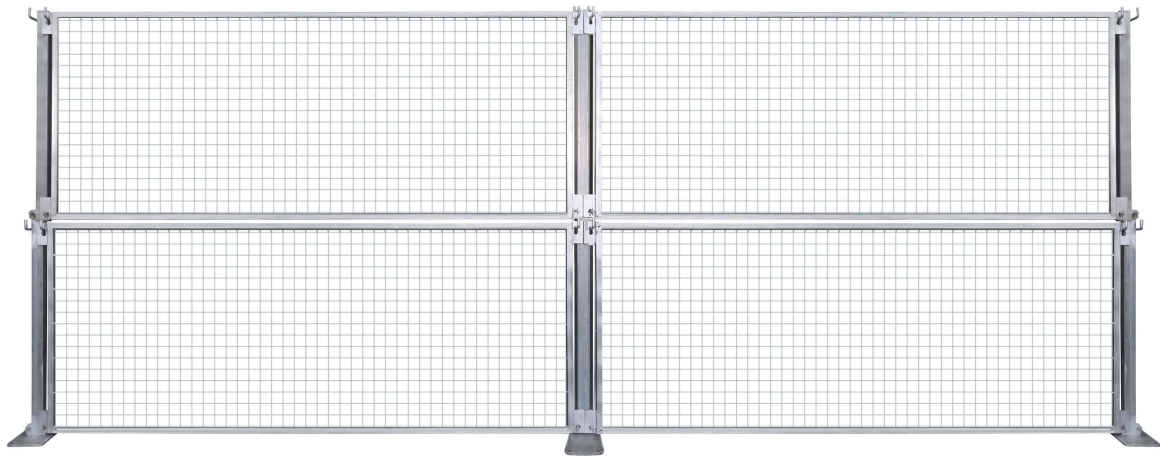

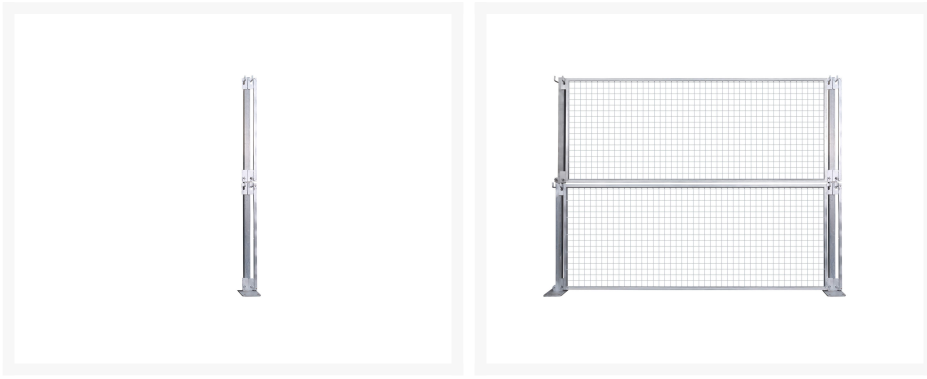

Short Description

Your versatile and reliable solution for temporary edge safety on site. Easy to install, weather-resistant, and compliant with AS/NZS 4994 standards.

Description

Key Features of J-Guard Edge Protection System:

- Modular and Flexible: Tailor the system to your specific requirements effortlessly.
- Easy Installation: No need for a certified installer, saving you time and money.
- Optimal Protection: Offers a substantial 940mm or 1880mm high barrier, providing enhanced safety.
- Weather-Resistant: Constructed with heavy-duty galvanized steel components to withstand harsh weather conditions.
- Streamlined Freight: Compact packaging ensures efficient delivery to your site.
- Reusable: Easily dismantle and reuse on future projects, maximizing your investment.

J-Guard Edge Protection System holds the following approvals:

- Tested and Approved to AS/NZS 4994—Temporary Edge Protection.

Applications:

J-Guard is ideal for a wide range of applications, including but not limited to:

- Concrete slab and formwork edges.
- Pits and excavations.
- Multi-deck and high-rise construction edges.
- Mezzanine floors and landings.
- Openings in floors or roof structures.
- Walkways, stairways, or ramps.
- Areas with varying floor heights.
- Additional protection for working at heights.

Additional Information

CODE	07-JG2300
U.O.M	Each
Swatch	no_selection

