


Manhole Sealant Mastic 3.6m

Product Images

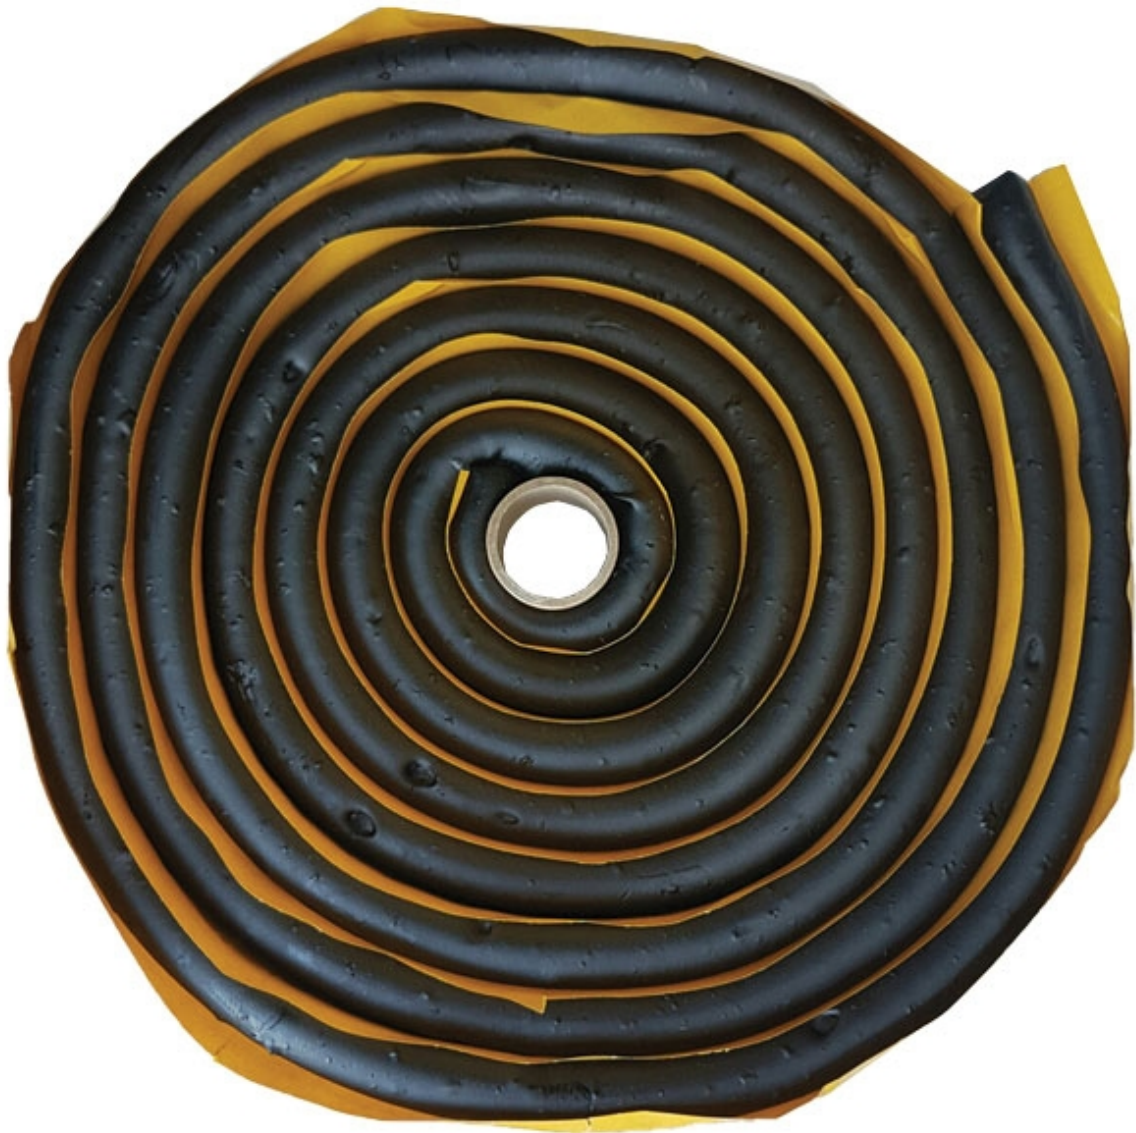

Short Description

Precast Manhole Sealant Matic, Size: 3.6m long roll. Remains permanently flexible whilst providing an excellent seal.

Description

This manhole sealant is a butyl mastic joint sealant that will stay flexible indefinitely. It is ideal for quick and effective sealing of pipes, manholes, tanks, precast components, wells and drains. A butyl-rubber based sealant, it is designed to be permanently flexible, tacky and resistant to moisture and deterioration by exposure to dilute chemical solutions.

Features:

- Meets ASTM C-990
- Seals quickly and effectively
- Excellent adhesion to surfaces
- Large working temperature range
- Stays permanently bonded yet maintains flexibility
- Non-toxic
- Will not oxidize or shrink
- Carton Qty: 15

Ideal for:

- Manholes
- Concrete pipes
- Septic tanks
- Precast box culverts
- Wet wells
- Storm drains

APPLICATION

Surface Preparation:

Brush down sealing surfaces to remove foreign material. Ensure sealing surface is free of moisture.

Placement:

Press the tip of the exposed sealant against bottom of the jointing surface, then wrap the sealant around the joint and butt the ends together. Remove the paper wrapper and couple the joint. Note that [wet or unusual conditions may require a primer - available separately from Jaybro.](#)

Clean Up:

Collect by Mechanical means. Mineral Turpentine may aid in cleanup of material stuck to surfaces.

Storage:

Store in a cool dry place in original packaging.

Additional Information

CODE	MHSEAL3
U.O.M	Each
Weight	250
Colour	Black
Min Working Temp	-25 degrees Celsius
Max Working Temp	+90 degrees Celsius

