# Grey PVC suction hose, 38 mm ID / 1.5" ID. Sold in custom lengths by the metre.

## Product Images

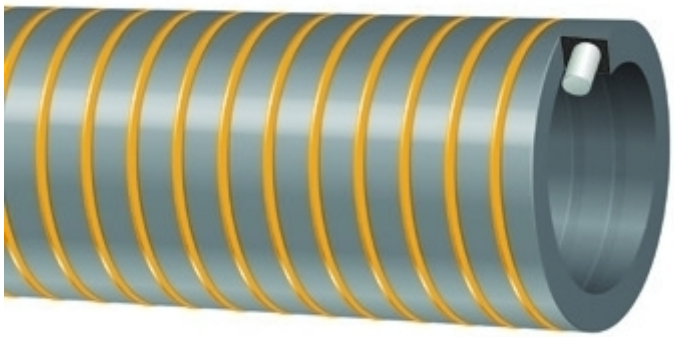

## Short Description

38 mm ID suction hose. Sold by the metre, standard length coils also available in 20m. Suitable for general conveyance of water, sludge, waste, sand, gravel and more. Commonly used for waste and pump suction hose.

## Description

Grey Suction Hose, 38 mm or 1.5" ID. Sold by the metre in continuous lengths up to 20 metres. Standard coil length is 20 metres, or Jaybro can supply a custom length of hose complete with fittings for your requirements.

Suitable for general suction applications including water, sludge, waste matter, some chemicals, granules, sand and gravel. Commonly used for liquid waste and pump suction hose.

With a temperature range of -5 degrees Celcius to +60 degrees Celcius, it is ideal for heavy duty suction applications in construction, civil, waste management and drainage industries.

Jaybro's suction hose is constructed from grey PVC reinforced with a rigid PVC helix, meaning it can stand up to the rigors of harsh weather and heavy duty use.

Plus, you can personalise your hose to suit your particular project: Jaybro stocks a wide range of hose fitting and clamps including Camlock, Bauer, Travis and Strainers claw type fittings to suit your specific needs. We can fit any hosetail kit you require.

Jaybro keeps up to 95% of our product on the shelf and in stock so we can deliver to you, fast!

- 38 mm ID / 1.5" ID
- 46 mm OD
- Working temperature -5 degrees Celcius +60 degrees Celcius
- Rated to working pressure of 6 bar / 90 psi
- Grey PVC reinforced helix construction
- Suitable for fluid, waste and sludge delivery or discharge
- Hose without fittings weighs 0.67kg per metre

## Additional Information

| | |
|---|---|
| CODE | WU-HS-2002M |
| U.O.M | Linear Metre |
| Hose Type | Liquid waste & vacuum evacuation |
| Material | PVC with a rigid helix reinforcement |
| Colour | Grey |
| Size | 38 mm I.D |
| Size (O.D) | 46 mm |
| Pressure (bar) | 6 |
| Pressure (psi) | 90 |
| Min Working Temp | -5 degrees Celcius |
| Max Working Temp | +60 degrees Celcius |