



# Hydrotite Rubber Waterstop 2mm x 20mm x 25m

## Product Images

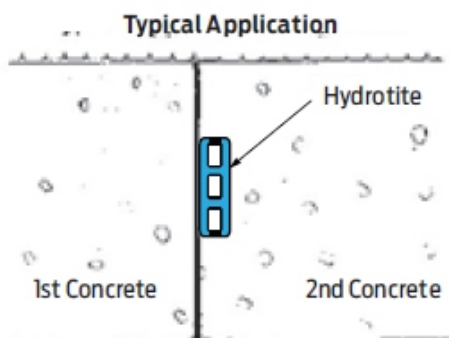



## Short Description

Hydrotite hydrophilic chloroprene rubber waterstop. This premium grade, water-swellaable water stop has excellent adhesion to concrete surfaces and a self adhesive backing for easy application.

## Description

Areas of application include sewerage treatment plants, water treatment plants, reservoirs, water tanks, swimming pools, tunnels, subway stations, basements, pits, pipe penetrations.

### Advantages

- Easy to handle and install
- Excellent adhesion to concrete surfaces
- Outstanding physical properties
- Profiles with self-adhesive backing allow for simple and fast installation processes
- Co-extruded design means expansion is directed across the joint for maximum seal

- Unaffected by repeated wet and dry cycles
- No site welding is required for joining processes
- Has a delay coating to help prevent premature expansion
- Extra delay coating is available for very wet conditions, if required
- Changes colour as a visual alert to let you know it has expanded
- No need for special intersections, joining is by simple butt joins
- Can be applied to rough surfaces using leakmaster gun grade waterstop
- Can be joined to traditional PVC waterstop
- No compaction or displacement problems
- Non toxic and non hazardous.

**Areas of Application**

- Sewerage Treatment Plants
- Water Treatment Plants
- Reservoirs
- Water Tanks
- Swimming Pools
- Tunnels
- Subway Stations
- Basements
- Pits
- Pipe Penetrations

**Additional Information**

---

CODE	40-DSS-0220
U.O.M	Each
Material	Rubber
Width	20 mm
Length	25 m

