


Abrasaflex Hose

Product Images

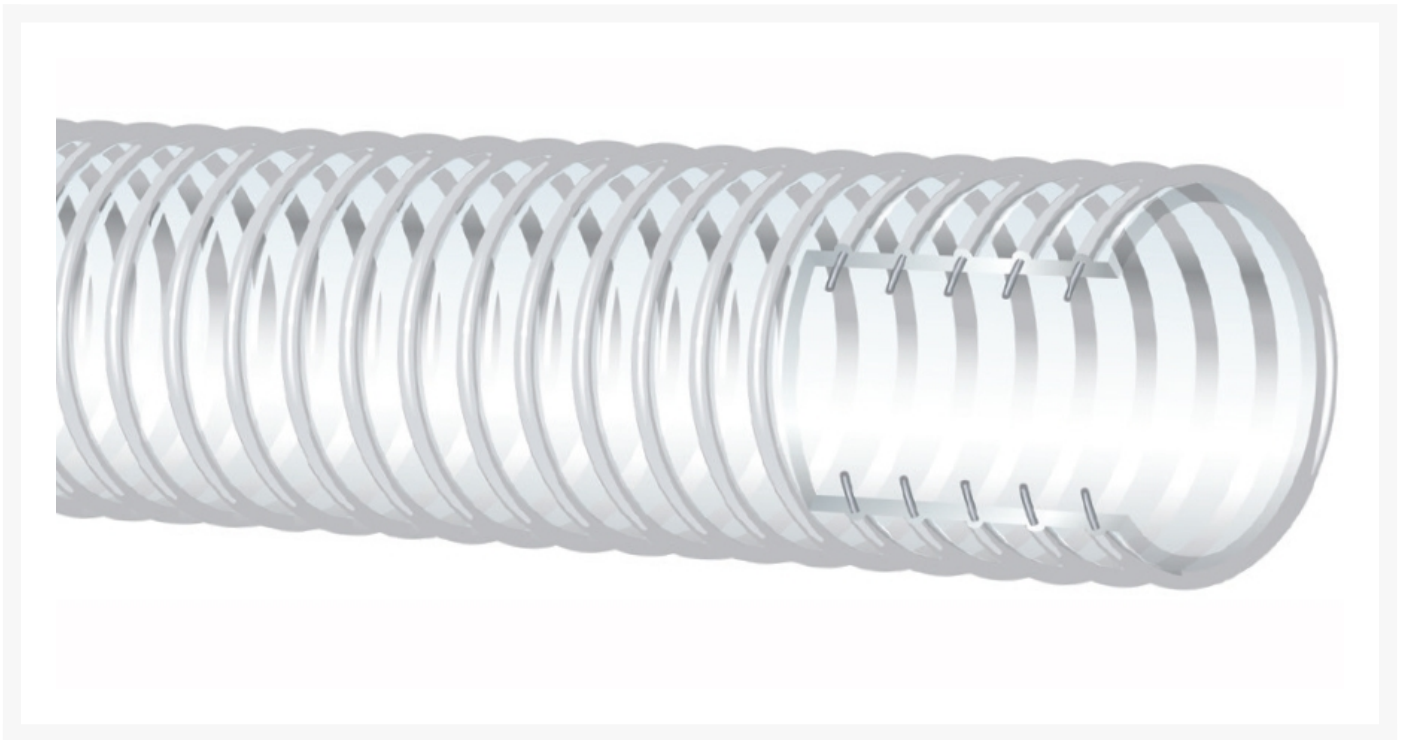

Short Description

Extremely flexible hose with a urethane inner for material handling applications in Vacuum Excavation and Seeder Machines

Highly abrasion resistant, extremely flexible, opaque tube.

See product details below for more information.

Description

CODE	Dimensions (mm)	Working Pressure	Ben Radius (mm)	Weight (kg/m)	Coil Length (m)
WU-HS-220010	32mm ID - 40mm OD	3 Bar - 40psi	250mm	0.39	20m
WU-HS-220011	38mm ID - 48mm OD	3 Bar - 40psi	310mm	0.45	20m
WU-HS-220012	50mm ID - 61mm OD	3 Bar - 40psi	350mm	0.76	20m
WU-HS-220013	65mm ID - 77mm OD	3 Bar - 40psi	370mm	1.46	20m
WU-HS-220014	75mm ID - 91mm OD	3 Bar - 40psi	400mm	1.77	20m
WU-HS-220015	100mm ID - 118mm OD	3 Bar - 40psi	500mm	3.48	20m
WU-HS-220016	125mm ID - 149mm OD	3 Bar - 40psi	550mm	5.7	10, 20m
WU-HS-220017	150mm ID - 172mm OD	3 Bar - 40psi	600mm	6.63	20m
WU-HS-220018	200mm ID - 227mm OD	3 Bar - 40psi	650mm	10.59	10, 20m

Additional Information

CODE	WU-HS-22-WP
U.O.M	Linear Metre
Weight	0.01
Hose Type	Liquid waste & vacuum evacuation
Material	PVC
Colour	Clear
Style	-5°C to +60°C

