


Heavy Duty Matpro Hose

Product Images

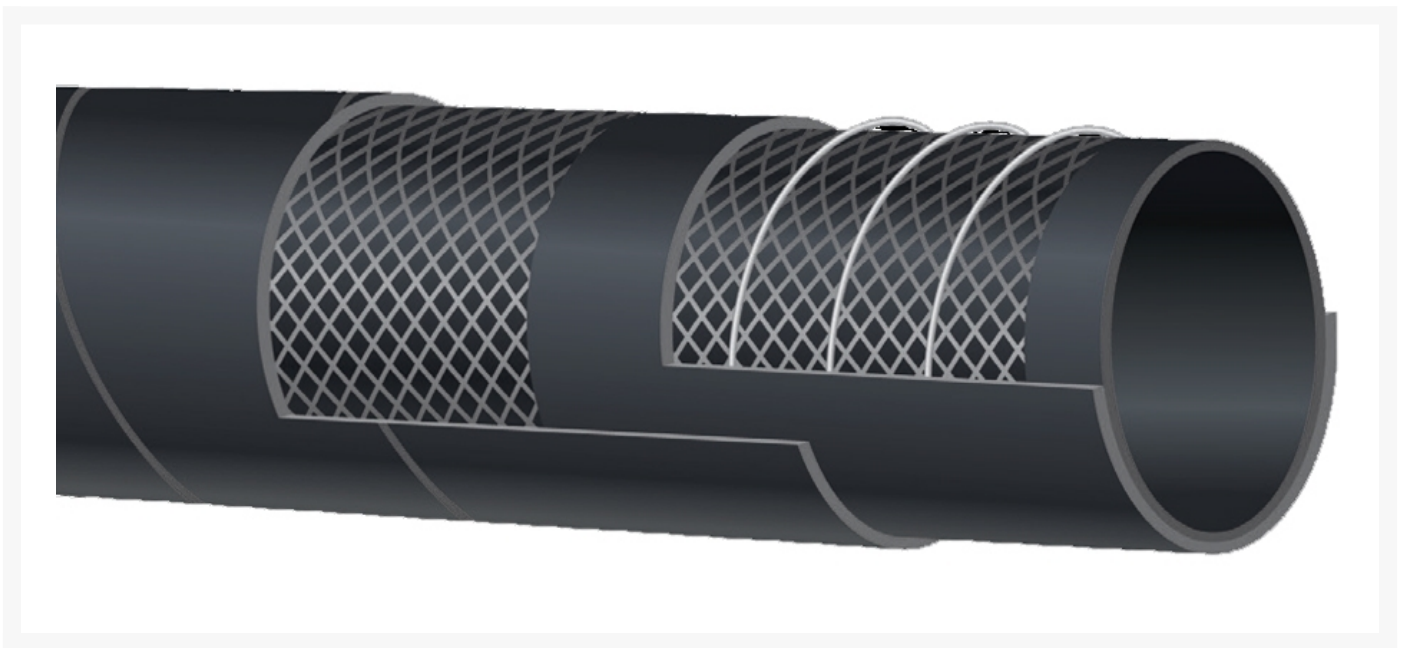

Short Description

Application: Heavy duty bulk material suction and delivery. Specially designed for abrasive material like gravel, cement etc. and used in vacuum excavation, often as boom hose.

Temperature Range: -30°C to +80°C , Tube: Black conductive NR — abrasion resistant, Reinforcing: High tensile textile cords with embedded steel helix wire. Black conductive SBR/NR — abrasion and ozone resistant.

Special Features: Highly abrasion resistant Safety Factor: 3:1

See product details below for more information.

Description

CODE	Dimensions (mm)	Working Pressure	Ben Radius (mm)	Weight (kg/m)	Coil Length (m)
WU-HS-3600	75mm ID - 90mm OD	10 Bar - 150psi	288mm	2.28	20m
WU-HS-3601	100mm ID - 116mm OD	10 Bar - 150psi	306mm	3.19	20m
WU-HS-3602	125mm ID - 143mm OD	5 Bar - 75psi	508mm	4.75	20m
WU-HS-3603	150mm ID - 168mm OD	5 Bar - 75psi	608mm	5.96	20m
WU-HS-3604	200mm ID - 221mm OD	5 Bar - 75psi	812mm	8.99	20m

Additional Information

CODE	WU-HS-36-WP
U.O.M	Linear Metre
Weight	0.01
Hose Type	Liquid waste & vacuum evacuation
Colour	Black
Style	-30°C to +80°C

