


# RE REEL HOSE

## Product Images

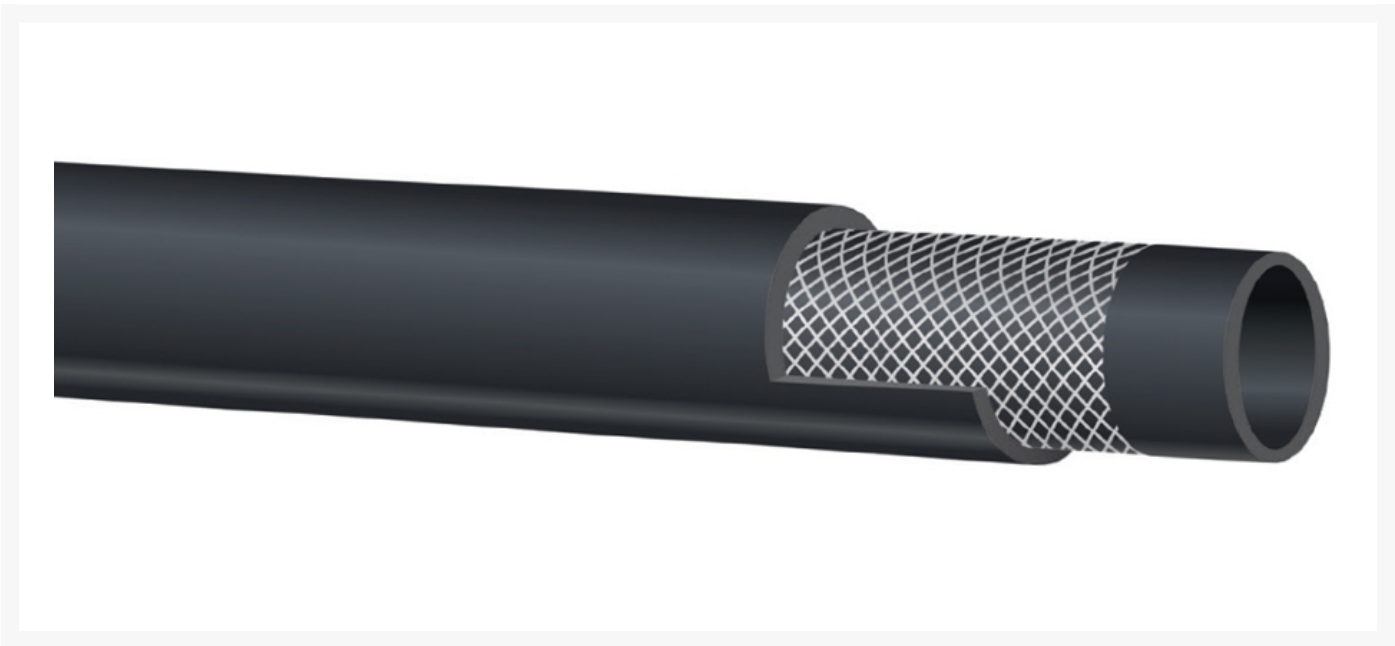

## Short Description

Application: Fire hose reels and firefighting applications or general water delivery.

Temperature Range: -5°C to +60°C, Construction: Black Inner Wall, Ribbed Black Outer Wall, Reinforcing: High Tensile Textile Cords,Special Features: Manufactured to AS/NZ1221, UV resistant

**See product details below for more information.**

## Description

| CODE | Dimensions (mm) | Working Pressure | Ben Radius (mm) | Weight (kg/m) | Coil Length (m) |
|------|-----------------|------------------|-----------------|---------------|-----------------|
|------|-----------------|------------------|-----------------|---------------|-----------------|

|              |                   |                 |     |      |                  |
|--------------|-------------------|-----------------|-----|------|------------------|
| WU-HS-170010 | 19mm ID - 26mm OD | 10 Bar - 150psi | N/A | 0.36 | 20,30,36,50 100m |
| WU-HS-170011 | 25mm ID - 32mm OD | 10 Bar - 150psi | N/A | 0.55 | 20,30, 36, 100m  |

## Additional Information

|           |                         |
|-----------|-------------------------|
| CODE      | WU-HS-1700-WP           |
| U.O.M     | Linear Metre            |
| Weight    | 0.01                    |
| Hose Type | Water & general liquids |
| Material  | PVC                     |
| Colour    | Black                   |
| Style     | -5°C to +60°C           |

