


# FRAS WATER SUCTION HOSE

## Product Images

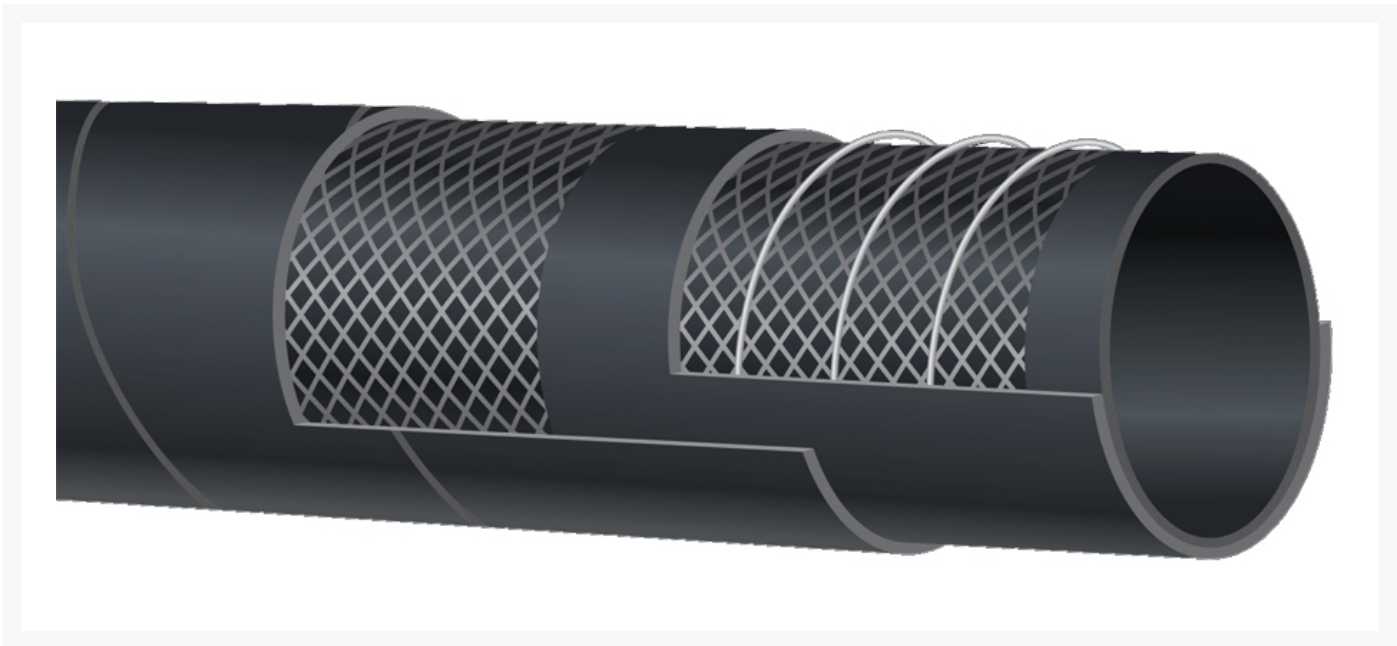

## Short Description

Application: Water and stone dust suction and delivery. Temperature Range: -30°C to +80°C, Tube: Black Conductive SBR/NR, Reinforcing: High Tensile Textile Cords with Embedded Steel Helix Wire. Cover: Black Conductive SBR — Abrasion, Ozone & Fire Resistant. Special Features: FRAS exceeds AS 2660/C. Safety Factor: 4:1

See product details below for more information.

## Description

CODE	Dimensions (mm)	Working Pressure	Ben Radius (mm)	Weight (kg/m)	Coil Length (m)
------	-----------------	------------------	-----------------	---------------	-----------------

WU-HS-5400	50mm ID - 61mm OD	10 Bar - 150psi	204	1.19	20m
WU-HS-5402	75mm ID - 88mm OD	10 Bar - 150psi	304	2.26	20m
WU-HS-5403	100mm ID - 116mm OD	10 Bar - 150psi	408	3.49	20m
WU-HS-5404	150mm ID - 170mm OD	10 Bar - 150psi	760	6.62	20m

## Additional Information

CODE	WU-HS-54-WP
U.O.M	Linear Metre
Weight	0.01
Hose Type	Water & general liquids
Material	Rubber
Colour	Black
Style	-30°C to +80°C

