


FRAS AIR WATER DELIVERY HOSE

Product Images

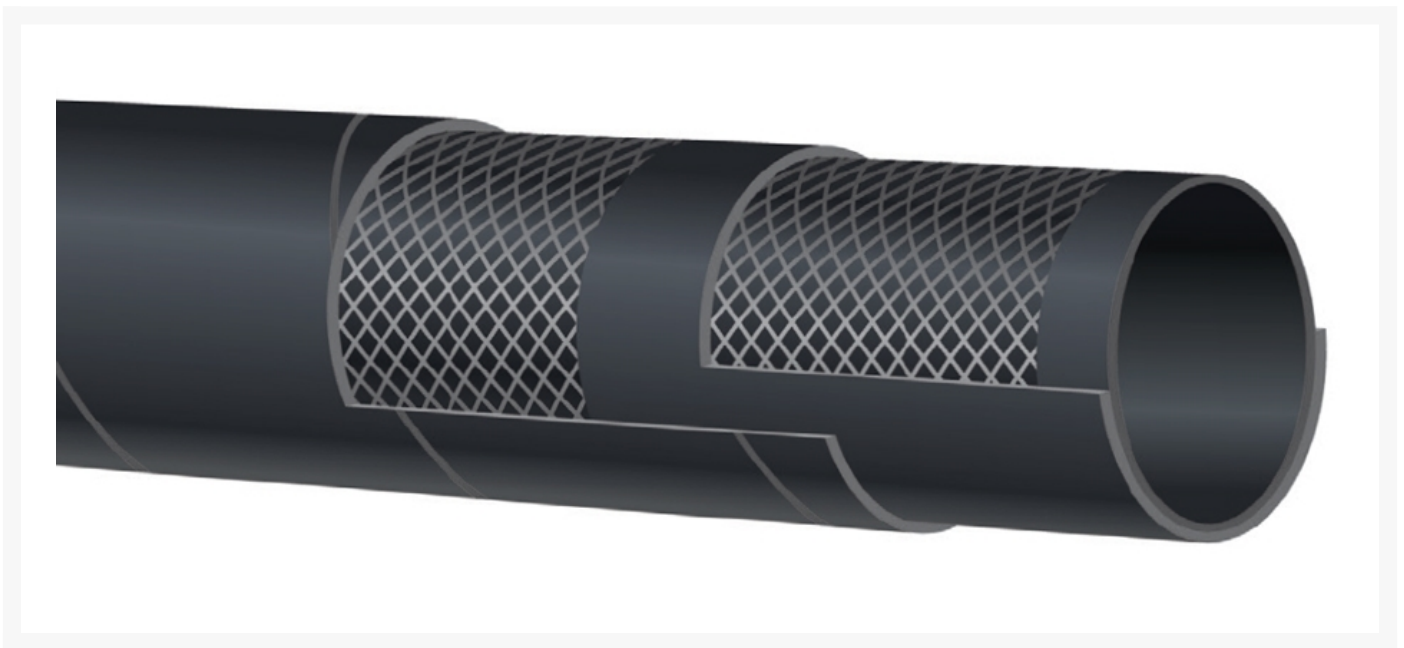

Short Description

Application: Air, water and stone dust delivery in underground mines. Temperature Range: -30°C to +80°C, Tube: Black Conductive SBR/NR. Reinforcing: High Tensile Textile Cords Cover: Black Conductive SBR - Abrasion. Ozone and Fire Resistant. Special Features: FRAS exceeds AS 2660/B. Safety Factor: <63mm 4:1, 76mm-100mm 3, 5:1

See product details below for more information.

Description

CODE	Dimensions (mm)	Working Pressure	Ben Radius (mm)	Weight (kg/m)	Coil Length (m)
------	-----------------	------------------	-----------------	---------------	-----------------

WU-HS-5500	32mm ID - 40mm OD	20 Bar - 300psi	78	0.39	20m
WU-HS-5501	38mm ID - 46mm OD	20 Bar - 300psi	114	0.52	20m
WU-HS-5502	50mm ID - 59mm OD	20 Bar - 300psi	150	0.66	20m
WU-HS-5503	65mm ID - 71mm OD	20 Bar - 300psi	192	1.00	20m
WU-HS-5504	75mm ID -84mm OD	20 Bar - 300psi	228	1.14	20m
WU-HS-5505	100mm ID - 110mm OD	20 Bar - 300psi	306	1.72	20m
WU-HS-5506	125mm ID - 137mm OD	20 Bar - 300psi	378	2.18	20m
WU-HS-5507	1250mm ID - 162mm OD	20 Bar - 300psi	456	2.52	20m
WU-HS-5508	200mm ID - 215mm OD	20 Bar - 300psi	612	3.38	20m

Additional Information

CODE	WU-HS-55-WP
U.O.M	Linear Metre
Weight	0.01
Hose Type	Water & general liquids
Class	-30°C to +80°C
Material	Rubber
Colour	Black
Style	-30°C to +80°C

