


Aftek PenaFlow UW 20Kg

Product Images

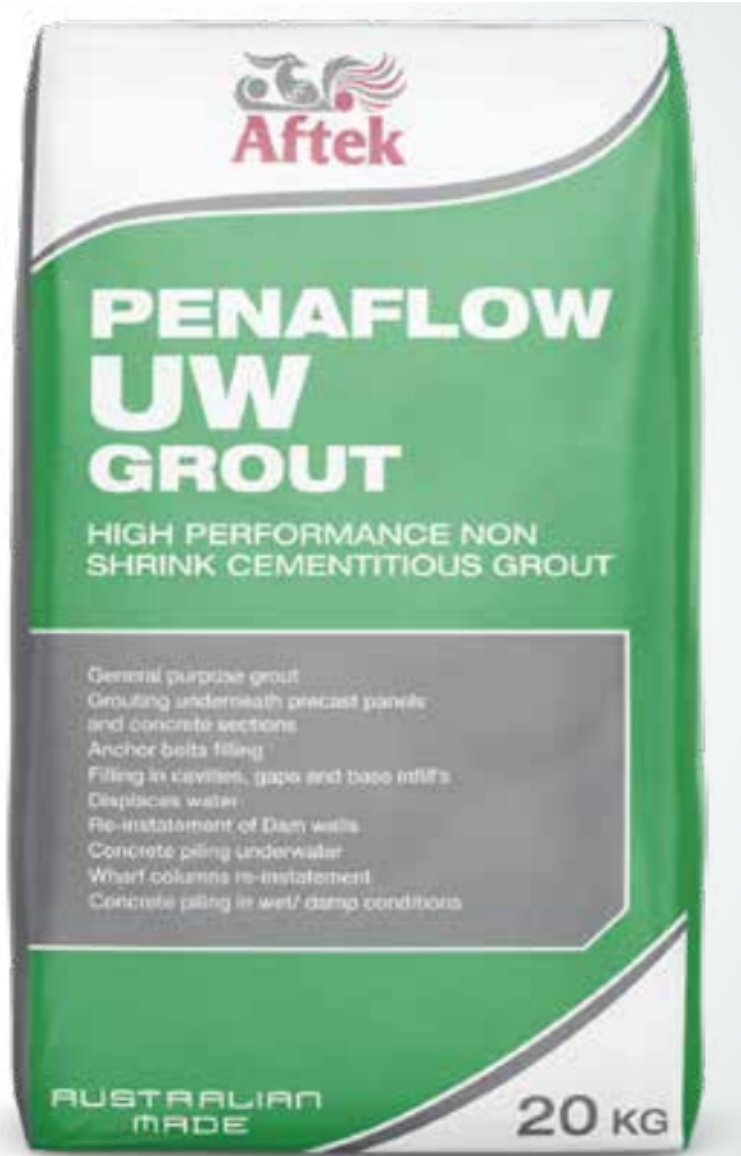

Short Description

Aftek PenaFlow UW Grout 20Kg

Description

Aftek PenafLOW UW is a high performance free flowing grout for applications requiring grouting under water or in tidal zones. PenafLOW UW is based on Portland cements, graded aggregates and chemical additives which control expansion whilst grout is in a plastic state.

There is no wash out of the cement matrix and the grout has the ability to displace water when submerged or immersed in water.

Recommended Uses:

- Suitable for use in bridge columns, dams, concrete pilings, wharf columns. Displaces water effectively
- Complete void filling resulting from gaseous expansion. High strength. Exceptional flow characteristics.

Features

- Shrinkage compensated
- Does not wash out in water
- Gaseous expansion while in plastic state eliminates shrinkage and settlement
- Displaces water
- Non-metallic iron content eliminates staining
- Can be dry packed, rammed, trowelled or poured
- Pump able for larger applications Pump able for larger applications
- Grouting from 20mm to 150mm in a single application

Additional Information

CODE	40-UWP20
Weight	0.01

