


GTG - Trench Grate and Frame

Product Images

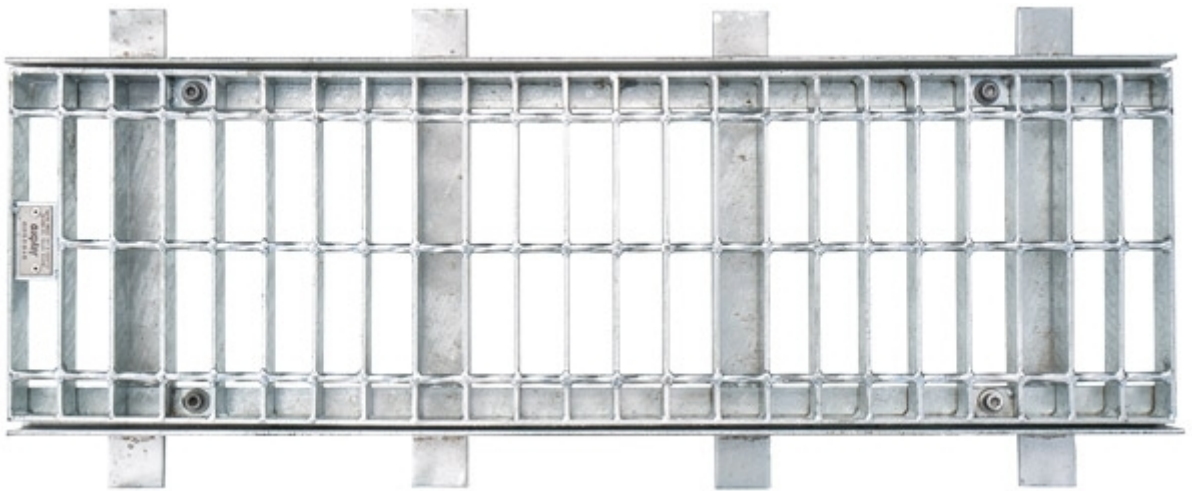

Short Description

Class D trench grates and frames available in 150mm, 250mm and 300mm options. Designed to align with Australian Standards with a durable galvanised finish. Available in 1 meter sections

Description

Suitable for numerous applications including driveways and carparks. The GTG range trench grate and frames are available in both bicycle safe and heel safe design. The grates come with bolts to reduce noise when driven over. Ideal for trench grating or strip drains, these grates are commonly used at the end of driveways and can be cast into the slab or into asphalt. Available in 3 sizes with a clear opening of 150 mm, 25 mm or 300 mm, they measure 1 metre long and are sold individually as a modular system to create the length of trench grate that you require.

Uses:

- Commercial properties
- Carparks
- Driveways
- Industrial Applications
- Trench grating
- Strip drains

Features:

- Class D Heavy Duty
- Tested to AS3996.2006
- Drop into Rebate of Jaybro precast pit
- Lockdown
- Bicycle Safe
- Heel proof grate available
- Nominal Wheel Loading 8000kg

	GTG300D	GTG250D	GTG150D
Design Load	210 kN	210 kN	210 kN
Certification	Complies to AS3996-2006	Complies to AS3996-2006	Complies to AS3996-2006
Coating	Galvanised Mild Steel	Galvanised Mild Steel	Galvanised Mild Steel
Locking Type	Bolt	Bolt	Bolt
Bicycle Safe	Yes	Yes	Yes
GRATE			
Overall Length	330 mm	330 mm	210 mm
Overall Width	1000 mm	1000 mm	1000 mm
Shape	Rectangle	Rectangle	Rectangle

	GTG300D	GTG250D	GTG150D
FRAME			
Overall Length	358 mm	308 mm	190 mm
Overall Width	1000 mm	1000 mm	1000 mm
Shape	Rectangle	Rectangle	Rectangle
Type	Steel Angle	Steel Angle	Steel Angle
Clear Opening Length	300 mm	250 mm	150 mm
Clear Opening Width	1000 mm	1000 mm	1000 mm

Additional Information

CODE	GTG-WP
U.O.M	Each

Product Options

Type:	Class D
Width:	150 mm
	250 mm
	300 mm

