


# Original Lock Joint, Black Capping

## Product Images

---



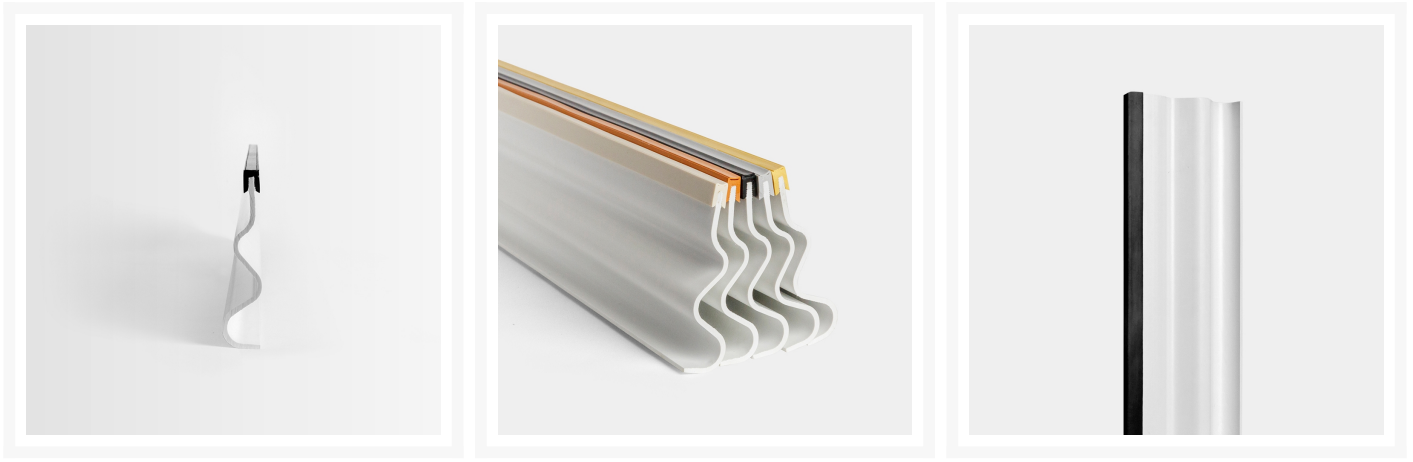

## Short Description

---

Lock Joint is a rigid plastic concrete joint with a patented curved design. This provides an even distribution of weight and locks together adjoining paving sections, allowing for movement without any cracking or unevenness between pavement sections. Supplied without pegs. Choose your size below - other sizes and capping colours available on request.

## Description

---

Original Lock Joint is a rigid plastic control joint with a patented curved design. This provides an even distribution of weight and locks together the adjoining pathway paving sections, allowing for movement without any cracking or unevenness between pavement sections. In pavements without Lock Joint, inevitable movement due to soil shifting or tree roots causes vertical displacement between the pavers known as stepping. This in turn causes trip hazards. The easy to install Lock Joint solves this issue, by using the unique curved profile to lock together adjoining pavement sections, allowing for movement without unevenness.

Strong and long-lasting, Lock Joint has been independently tested by NATA engineers to move only 0.6mm when subjected to a vertical displacement of 110mm. This is in comparison to competitor products that allow movement of up to 80% more. When installed correctly, Lock Joint will last for the lifetime of the footpath. This means that Lock Joint can significantly reduce maintenance and replacement costs over a lifetime.

It is fast and easy to install, with a flat bottomed design that makes placement easy, and a convenient removable rubber capping that peels back quickly to reveal a smooth join. The included black rubber capping prevents sand from entering the joint, stopping weed growth and greatly reducing maintenance costs. It also provides a safer, smoother surface for pedestrians and cyclists.

### Features:

- Zip off black rubber capping
- Flat base
- Made from durable PVC
- Independently tested for durability
- Easy to handle
- Australian designed and made
- 100% recyclable

- Available in other colours and lengths - please enquire

**Easy Installation Process:**

- Zip off black rubber capping
- Position the Lock Joint
- Insert pegs or backing board
- Pour concrete
- Screed and remove pegs
- Bull float, trowel and brush finish
- Remove zip off capping to expose a smooth join

**Additional Information**

|       |            |
|-------|------------|
| CODE  | 40-LJB-WP  |
| Brand | Lock Joint |

**Product Options**

|         |        |
|---------|--------|
| Length: | 1.2 m  |
|         | 1.5 m  |
|         | 2 m    |
| Size:   | 75 mm  |
|         | 100 mm |
|         | 125mm  |

